










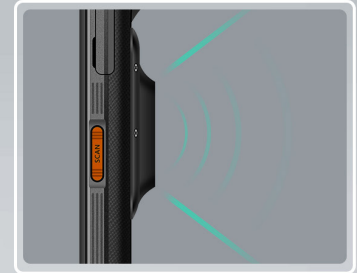




UHF RFID



C71

**Mobile Computer
UHF RFID**

- | | | | | | |
|---|---|---|--|--|---|
| 
Android | 
4G | 
WiFi | 
Bluetooth | 
UHF | 
1D Barcode |
| 
2D Barcode | 
IRIS | 
NFC | 
Camera | 
GPS | |

Chainway C71 is an Android rugged mobile computer. It can be configured with internal UHF module with 1dBi circularly polarized antenna. With its powerful processor and wireless connections, you can find this easy-to-deploy device an exceptionally valuable helper to increase working efficiency and productivity in retail, logistics and healthcare.



Specification

Performance

CPU	Cortex-A53 2.5 GHz Octa-core
RAM+ROM	3 GB + 32 GB 4 GB + 64 GB (optional)
Expansion	Supports up to 128 GB Micro SD card
Operating System	Android 8.1; Soti MobiControl, SafeUEM supported

Communication

WLAN	IEEE802.11 a/b/g/n/ac, 2.4G/5G dual-band, internal antenna
WWAN (China)	2G: 900/1800 MHz
	3G: WCDMA: B1,B8 CDMA2000 EVDO: BC0 TD-SCDMA: B34,B39
	4G: B1,B3,B5,B8,B34,B38,B39,B40,B41
WWAN (Europe)	2G: 850/900/1800/1900 MHz
	3G: B1,B2,B4,B5,B8 4G: B1,B3,B5,B7,B8,B20,B40
WWAN(America)	2G: 850/900/1800/1900 MHz
	3G: B1,B2,B4,B5,B8 4G: B2,B4,B7,B12,B17,B25,B66
WWAN (Others)	Depending on the country's ISP
Bluetooth	Bluetooth v2.1+EDR,3.0+HS,v4.1+HS
GNSS	GPS/AGPS, GLONASS, BeiDou; internal antenna

Physical Characteristics

Dimensions	164.2 x 78.8 x 17.5 mm / 6.46 x 3.10 x 0.69 in.
Weight	< 321 g / 11.32 oz.
Display	5.2" IPS FHD 1920 x 1080
Touch Panel	Corning Gorilla Glass, multi-touch panel, gloves and wet hands supported
Power	Main battery: Li-ion, rechargeable, 5000mAh
	Standby: over 350 hours
	Continuous use: over 12 hours (depending on user environment) Charging time: 3-4 hours (with standard adaptor and USB cable)
Expansion Slot	1 slot for SIM card, 1 slot for SIM or TF card
Interfaces	USB 2.0 Type-C, OTG, TypeC headphones supported
Audio	Speaker, 2 microphones
Keypad	4 front keys, 1 power key, 2 scan keys, 1 multifunctional key
Sensors	Gravity sensor, light sensor, proximity sensor, vibration motor

Developing Environment

SDK	Chainway Development Kit
Language	Java
Tool	Eclipse / Android Studio

User Environment

Operating Temp.	-4 °F to 122 °F / -20 °C to 50 °C
Storage Temp.	-40 °F to 158 °F / -40 °C to 70 °C
Humidity	5% RH - 95% RH non condensing
Drop Specification	Multiple 1.8 m / 5.9 ft. drops (at least 20 times) to the concrete across the operating temperature range
Tumble Specification	1000 x 0.5m / 1.64 ft. falls at room temperature
Sealing	IP65 per IEC sealing specifications
ESD	±15 KV air discharge, ±6 KV conductive discharge

Data Collection

UHF RFID

Frequency	865-868 MHz / 920-925 MHz / 902-928 MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Antenna	Circular polarization (1 dBi)
Power	1 W (+19 dBm to +30 dBm adjustable)
R/W range	3 m

* Ranges and rates depend on tags and environment

Camera

Rear Camera	13 MP Autofocus with flash
Front Camera (optional)	8 MP camera

NFC

Frequency	13.56 MHz
Protocol	ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc.
Chips	M1 card (S50, S70), CPU card, NFC tags, etc.
Range	2-4 cm

Barcode Scanning (optional)

1D Linear Scanner	Zebra: SE965; Honeywell: N4313
1D Symbologies	UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc.
2D Imager Scanner	Zebra: SE4710 / SE4750 / SE4750MR; Honeywell: N6603
2D Symbologies	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX), etc.

Iris (optional)

Rate	< 150 ms
Range	20-40 cm
FAR	1/10000000
Protocol	ISO/IEC 19794-6, GB/T 20979-2007

Accessories

Standard	AC Adaptor, USB Cable, Lanyard, etc.
Optional	Cradle, Holster, etc.

* For detailed specification, please check Accessory Guide.

Notice: Product specifications are subject to change without prior notice. / Model: C71 UHF / Update Date: 2020-11-16

CHAINWAY®

Shenzhen Chainway Information Technology Co., Ltd

Address: 9F, Building2, Phase 2, Gaoxinqi Industrial Park, Liuxian 1st Rd., Bao'an District, Shenzhen, Guangdong 518102, China

Tel: 0086-755-23223316

Fax: 0086-755-23223310

Email: sales@chainway.cn

Web: http://www.chainway.net